
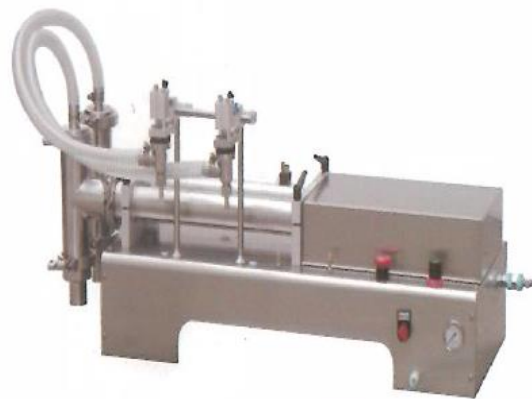


URBAN OUTSOURCING

info@urbanoutsourcing.co.za,/Craig Noble 0834757116

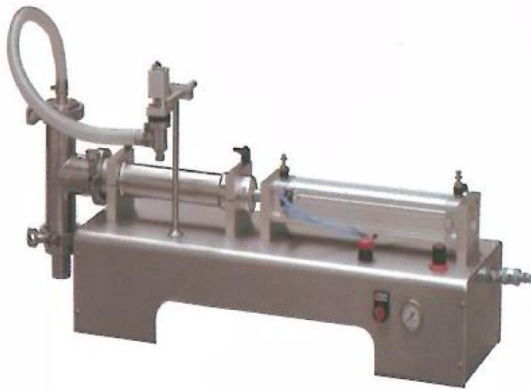

Piston filling machine specifications

Single Head

Air requirement: 0.4-.06MPa

Filling accuracy: $\pm < 1\%$

Single head filling speed 5-20 Bpm

Double head

Air requirement: 0.4-.06MPa

Filling accuracy: $\pm < 1\%$

Double head filling speed 10-40 Bpm

- Below Models available with Spring loaded Teflon valve for thin liquids and includes non drip shut off nozzle
- Below models available with 3 way valve and hopper for pasty products including non drip shut off nozzle

Single cylinder Fill range

10ml

60ml

125ml

250ml

500ml

1000ml

2500ml

5000ml

Double cylinder Fill range

N/A

2 X 60ML

2 X 125ML

2 X 250ML

2 X 500ML

2 X 1000ML

2 X 2500ML

2 X 5000ML