


CMB - 3



Leaders in Pharma Machinery

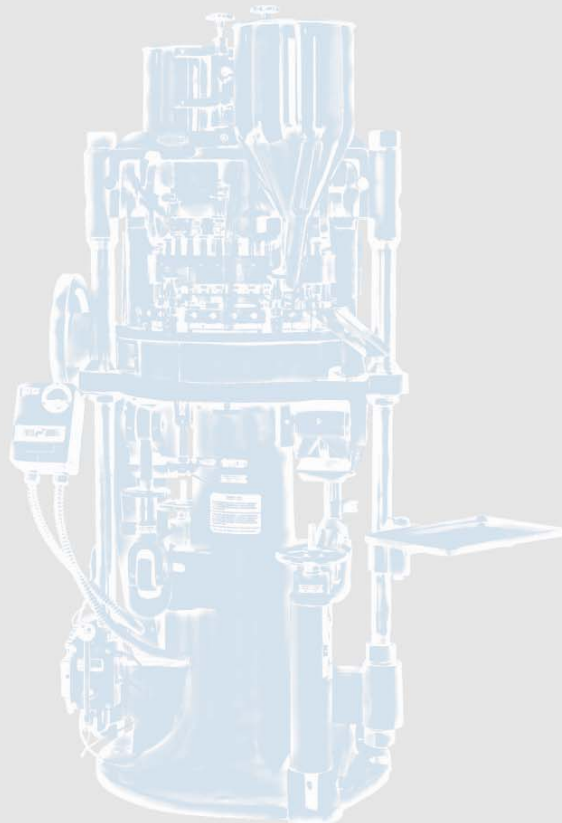

SPECIAL FEATURES:

Easier adjustment of feed frame

Latest worm bearing design

Modified upper cam tracks

Easier cleaning procedure with lower punch guards

Turret with lower punch anti-turning devices.

Slotted upper punch holes in the turret facilitate use of shaped punches

Three piece turret with Stainless Steel 304/316 Die table

Combination tooling with "D" & "B" Tooling on same turret

Bi-Layer Tablet attachment

TECHNICAL SPECIFICATIONS:

Type	CMB3 D- 27	CMB3 - 27	CMB3 - 35	CMB3 - 45
Number of Station	27	27	35	45
Type of Tooling	D	B	B	BB
Output (Tablets/Hr)*				
Maximum	97200	97200	126000	162000
Minimum	48600	48600	63000	81000
Max. Operating Pressure (KN)	100	65	65	65
Max. Tablet Diameter (mm)	25	16	16	11
Max. Depth of Fill (mm)	20	17	17	17
Total Power (Kw/Hp)	2.25 / 3.00			
Main Electric Motor (Kw/Hp)	2.25 / 3.00			
Electrics	(a) 415V / 3 Phase / 50 Hz (b) 480V / 3 Phase / 60 Hz (c) 220V / 3 Phase / 60 Hz			
Overall Dimensions L x W x H (cm)	115 x 111 x 173			
Net Weight (kg)	1170			
Case Dimensions L x W x H (cm)	137 x 130 x 188			
Gross Weight (kg)	1420			

*Depending upon Tooling Size, Shape and also Material Characteristics.



Cadmach Machinery Co. Pvt. Ltd.

Plot No. 3604/3605. G.I.D.C. Phase IV, Vatva, Ahmedabad - 382 445, INDIA

Phone: +91-79-2584 1491/92/93, 2584 0817, 2584 1853, 2584 1391

Email: info@cadmach.com, cadmachad1@sancharnet.in Website: www.cadmach.com